

ENDURO 300

ICE DRINK DISPENSER



FEATURES

Merchandising - Highly efficient LED illuminated merchandiser utilizing a brighter, longer lasting bulb, providing a high impact visual display

Quality - Built-in cold carbonator produces bottle-quality drinks every time

Low Maintenance - No seasonal CO₂ adjustments required for changes in water temperature

Simple - A complete system for simplified installation reduces service frequency and lowers equipment life cost and generates increased beverage sales and greater consumer satisfaction


Intelligent - Ice used to cool cold plate kept separate from ice dispensed into cups

Durability - One piece ABS thermoformed plastic ice storage hopper. Durabide™ design provides durability and ensures all ice in the hopper is dispensable

Flexible - Unit readily accepts top mount cubers with manual ice fill capability

TotalFlex[™] - Equipped with TotalFlex[™]



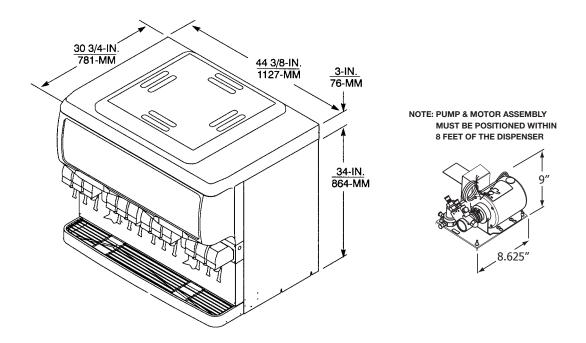

PART NUMBER	DESCRIPTION
621053902	Enduro 300 IntelliCarb dispenser with 12 UFB-1™ 2-4 oz (59.2 - 118.3 mL) Sanitary Lever valves
621053901	Enduro 300 IntelliCarb dispenser with 12 UFB-1™ 2-4 oz (59.2 - 118.3 mL) Push Button valves
621052904	Enduro 300 IntelliCarb dispenser with 12 UFB-1™ 2-4 oz (59.2 - 118.3 mL) Optifill™ valves
08017	Leg Kit contains six 4" (102 mm) legs

Enduro 300 IntelliCarb unit includes timed ice agitation and beverage key switch. See price book for ice maker adapter kit. Order leg kit separately.

Syrup: 0.375" (9.5 mm)

TECHNICAL SPECIFICATIONS

TYPE OF VALVES	UFB-1 [™] 2-4 oz / sec post-mix	DRAIN SIZE	0.75" (19.1 mm) pvc (npt) or 1" (25.4 mm) pvc (npt)
NUMBER OF VALVES	12		pipe or flexible tubing
BEVERAGE MANIFOLDING:	TotalFlex™	ELECTRICAL REQUIREMENTS	120 V / 60 Hz / 5.2 Amps
CUP CLEARANCE	10" (254 mm)	SHIPPING WEIGHT	465 lb (211 kg)
GRAPHIC DIMENSIONS	Overall: 11.1"H x 39"W Viewable: 10.2"H x 37.9"W	AGENCY LISTINGS	City of Los Angeles

Pepsi and IntelliCarb are registered trademarks of Pepsi Co, Inc.

ICE STORAGE CAPACITY..... 300 lb (136 kg)

CONNECTIONS Water: 0.375" (9.5 mm)



IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A.
Ph: 763.488.8200
Email: webmaster@cornelius.com

101 Broadway Street West Osseo, MN 55369 www.cornelius.com